




Ⓢ Conduit Strap One Hole

Material: Malleable Iron

Application: for securing Rigid or IMC conduit to any surface where greater load bearing is required

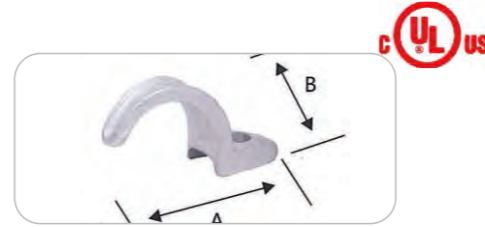

| TOPELE# | Trade Size | Shelf QTY | Master QTY | Dim A(inch) | Dim B(inch) |
|---------|------------|-----------|------------|-------------|-------------|
| MS01 | 1/2" | * | 1000 | 2.252 | 0.942 |
| MS02 | 3/4" | * | 500 | 2.556 | 1.221 |
| MS03 | 1" | * | 250 | 3.061 | 1.500 |
| MS04 | 1-1/4" | * | 200 | 3.692 | 1.878 |
| MS05 | 1-1/2" | * | 100 | 4.000 | 2.056 |
| MS06 | 2" | * | 25 | 5.062 | 2.561 |
| MS07 | 2-1/2" | * | 25 | 5.938 | 3.062 |
| MS08 | 3" | * | 25 | 7.442 | 3.808 |
| MS10 | 4" | * | 10 | 8.691 | 5.000 |

Ⓢ Conduit Strap Back Spacer

Material: Malleable Iron

Application: for use with one hole strap to provide space between conduit and mounting surface



| TOPELE# | Trade Size | Shelf QTY | Master QTY | Dim A(inch) | Dim B(inch) |
|---------|------------|-----------|------------|-------------|-------------|
| MB01 | 1/2" | * | 250 | 2.055 | 1.000 |
| MB02 | 3/4" | * | 250 | 2.382 | 1.061 |
| MB03 | 1" | * | 250 | 2.942 | 1.252 |
| MB04 | 1-1/4" | * | 100 | 3.500 | 1.880 |
| MB05 | 1-1/2" | * | 100 | 3.805 | 1.440 |
| MB06 | 2" | * | 50 | 4.751 | 1.936 |
| MB07 | 2-1/2" | * | 25 | 5.752 | 2.445 |
| MB08 | 3" | * | 10 | 6.688 | 2.625 |
| MB10 | 4" | * | 10 | 8.880 | 3.062 |

Ⓢ Conduit Bushing

Standard: UL 514B and C22.2 No. 18.3-12

Material: Zinc

Application: for use with locknut to terminate Rigid or IMC conduit to a box or enclosure



| TOPELE# | Trade Size | Shelf QTY | Master QTY | Dim A(inch) | Dim B (inch) |
|---------|------------|-----------|------------|-------------|--------------|
| CB-50 | 1/2" | 150 | 4500 | 1.051 | 0.788 |
| CB-75 | 3/4" | 100 | 1000 | 1.325 | 0.984 |
| CB-100 | 1" | 50 | 500 | 1.585 | 1.260 |
| CB-125 | 1-1/4" | 50 | 500 | 1.950 | 1.594 |
| CB-150 | 1-1/2" | 35 | 350 | 2.200 | 1.831 |
| CB-200 | 2" | 20 | 200 | 2.695 | 2.323 |
| CB-250 | 2-1/2" | * | 200 | 3.235 | 2.776 |
| CB-300 | 3" | * | 150 | 3.885 | 3.464 |
| CB-350 | 3-1/2" | * | 100 | 4.360 | 3.895 |
| CB-400 | 4" | * | 80 | 5.010 | 4.448 |

Ⓢ Insulated Conduit Bushing

Material: Zinc

Application: for use with locknut to terminate Rigid or IMC conduit to a box or enclosure



| TOPELE# | Trade Size | Shelf QTY | Master QTY | Dim A(inch) | Dim B (inch) |
|---------|------------|-----------|------------|-------------|--------------|
| ICB-50 | 1/2" | 150 | 1500 | 1.051 | 0.788 |
| ICB-75 | 3/4" | 100 | 1000 | 1.325 | 0.984 |
| ICB-100 | 1" | 50 | 500 | 1.585 | 1.260 |
| ICB-125 | 1-1/4" | 50 | 500 | 1.950 | 1.594 |
| ICB-150 | 1-1/2" | 35 | 350 | 2.200 | 1.831 |
| ICB-200 | 2" | 20 | 200 | 2.695 | 2.323 |
| ICB-250 | 2-1/2" | * | 200 | 3.235 | 2.776 |
| ICB-300 | 3" | * | 150 | 3.885 | 3.464 |
| ICB-350 | 3-1/2" | * | 100 | 4.360 | 3.895 |
| ICB-400 | 4" | * | 80 | 5.010 | 4.448 |

Ⓢ Conduit Bushing

Material: Plastic

Application: for use with locknut to terminate Rigid or IMC conduit to a box or enclosure



| TOPELE# | Trade Size | Shelf QTY | Master QTY | Dim A(inch) | Dim B (inch) |
|---------|------------|-----------|------------|-------------|--------------|
| PCB-50 | 1/2" | 100 | 1000 | 1.056 | 0.786 |
| PCB-75 | 3/4" | 100 | 1000 | 1.318 | 0.985 |
| PCB-100 | 1" | 50 | 250 | 1.588 | 1.260 |
| PCB-125 | 1-1/4" | 25 | 250 | 1.955 | 1.594 |
| PCB-150 | 1-1/2" | 25 | 250 | 2.190 | 1.831 |
| PCB-200 | 2" | 25 | 125 | 2.681 | 2.323 |
| PCB-250 | 2-1/2" | 10 | 50 | 3.248 | 2.776 |
| PCB-300 | 3" | 10 | 50 | 3.871 | 3.465 |
| PCB-350 | 3-1/2" | 10 | 40 | 4.365 | 3.895 |
| PCB-400 | 4" | 10 | 40 | 5.012 | 4.449 |

Ⓢ Insulated Grounding Bushing

Material: Malleable Iron

Application: for use with locknut to terminate Rigid or IMC conduit to a box or enclosure and quick installation of bonding jumper



| TOPELE# | Trade Size | Shelf QTY | Master QTY | Dim A(inch) | Dim B (inch) |
|---------|------------|-----------|------------|-------------|--------------|
| IGB-50 | 1/2" | * | 500 | 1.260 | 0.787 |
| IGB-75 | 3/4" | * | 500 | 1.481 | 0.986 |
| IGB-100 | 1" | * | 300 | 1.800 | 1.262 |
| IGB-125 | 1-1/4" | * | 200 | 2.405 | 1.595 |
| IGB-150 | 1-1/2" | * | 200 | 2.500 | 1.832 |
| IGB-200 | 2" | * | 125 | 3.028 | 2.325 |
| IGB-250 | 2-1/2" | * | 100 | 3.600 | 2.778 |
| IGB-300 | 3" | * | 60 | 4.162 | 3.466 |
| IGB-350 | 3-1/2" | * | 60 | 4.748 | 3.898 |
| IGB-400 | 4" | * | 60 | 5.298 | 4.450 |